



HIGH POWER, DIODE-PUMPED Nd:YAG LASER MODEL ILM-100MQ

An innovative laser optics design, combined with an industrial-grade power supply, results in an extraordinarily reliable and rugged diode-pumped Nd:YAG laser for industrial use. A totally solid-state laser for trouble-free manufacturing!

- **Efficient diode optical pumping for improved performance and reliability**
- **High power output from small diameter, low divergence beam**
- **Highly circular multimode beam profile**
- **Q-switched pulse stability < 3% rms up to 10 kHz**
- **Efficient water/water heat exchanger cooling system**
- **"CE Mark" Certified; this is a CDRH Class IV laser product**

Wavelength: 1064 nm
Transverse Mode: Multimode
Beam Diameter, nominal: < 2.0 mm
Beam Divergence (full angle), nominal: 6.0 mRad
Polarization: Random

Q-switched Performance:

Frequency (kHz):	10
Average Power (W):	70
Pulse Energy (mJ):	7.0
Pulse Width (ns), nominal:	200
Peak Pulse Power (kW):	35

Mechanical:



Optical Rail Length, standard: 1219 mm
Power Station Dimensions: 876H x 521W x 470D mm

Electrical Power:

Recommended Service: 220 +/- 10% VAC, 1-phase, 50/60 Hz, 20A
Average Consumption: 2 kW, maximum

Water:

Internal, water/water cooled: City water cooled, 8 L/m @ 16° C max temp. Self-contained refrigerated chiller optionally available.

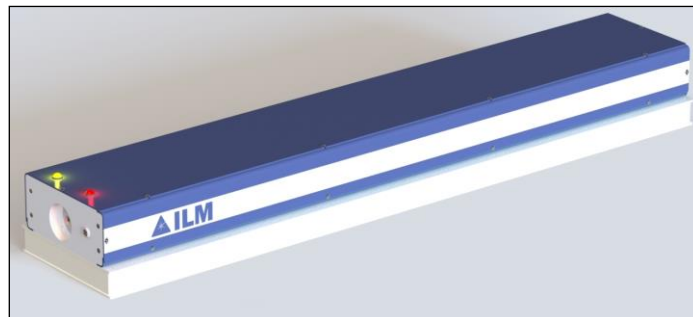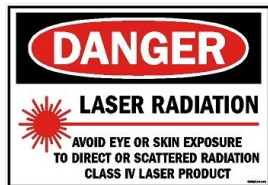

ILM follows a policy of continuous improvement. Specifications are subject to change without notice.